

Rec'd PCT/PT 06 JAN 2005

PCT/EP 03/06750



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

10/520606

REC'D 04 AUG 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02254746.7

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Anmeldung Nr:
Application no.: 02254746.7
Demande no:

Anmeldetag:
Date of filing: 08.07.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SHELL INTERNATIONALE RESEARCH
MAATSCHAPPIJ B.V.
Carel van Bylandtlaan 30
2596 HR Den Haag
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Choke system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

E21B/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

CHOKE SYSTEM

The invention relates to a drilling system for drilling a well bore into an earth formation, comprising:

- drilling means for drilling a well bore;
- pumping means for pumping drilling fluid into the well bore during drilling; and
- a drilling fluid outlet system for retrieving drilling fluid from the well bore.

Such a drilling system is for example known from WO-00 79092. In this publication it is disclosed that the drilling fluid outlet system is used to maintain control over the fluid pressure at the well bore wall, especially when drilling is stopped or during tripping of the drill string out of the bore hole. Without maintaining control over the pressure, there is a potential danger that undesired fluid flows from the earth formation into the bore hole, or that the borehole wall collapses.

According to prior art systems, the pressure is controlled by pumping fluid into the bore hole, via the annulus. Such a drilling fluid outlet system could further comprise a safety choke, in case the pump fails.

However due to large rock debris or contaminated mud, the safety choke could get clogged or could be damaged, which jeopardises correct control over the pressure in the well bore.

It is an object of the invention to alleviate the disadvantages of the prior art and to provide a system

that is capable of regulating the pressure while the flow may contain large rock debris or contaminated mud.

5 This object is achieved by a drilling fluid outlet system comprising choke means for choking the returned flow of retrieved drilling fluid and alternating means for alternating the flow direction through the choke means.

10 So if the choke means would get clogged, the returned flow is alternated, such that the choke means are cleaned and the debris is discharged.

15 According to a preferred embodiment the drilling fluid outlet system comprises an inlet and an outlet, the choke means comprise a first inlet/outlet connection, a second outlet/inlet connection and the alternating means connect the inlet alternately to the first or second connection and the outlet alternately to the second or first connection. So with these alternating means it is possible to connect the choke means such that the inlet is used as an inlet or outlet and that at the same time
20 the outlet is used as outlet or inlet.

In another embodiment of the drilling system according to the invention filter means are arranged in the first and second connection of the choke means.

25 These filter means block large pieces, which could damage the choke means. Upon alternating the flow direction blocked pieces at the filter means are discharged.

30 In again another embodiment of the drilling system according to the invention, the alternating means comprise a four way valve, having four connections and wherein the connections are connected two by two. With such a valve, which could be actuated automatically,

alternating of the flow is performed quickly. This will provide a minimum interruption of the flow.

5 Preferably the drilling fluid outlet system comprises an accumulator. This accumulator secures a constant flow at the moment that the flow direction is alternated.

10 In yet another embodiment of the drilling system according to the invention, the choking means comprises a bi-directional choke. Such a bi-directional choke provides a choking action in both flow directions. This provides for a compact design.

15 In another embodiment the choking means comprise at least two uni-directional chokes. Such uni-directional chokes provide a choking action in only one flow direction. Therefore two chokes are necessary to provide a choking action in both flow directions.

The invention relates also to a drilling fluid outlet system.

These and other advantages of the invention will be elucidated in conjunction with the accompanying drawings.

20 Figure 1 shows a schematic view of a drilling system according to the invention.

Figure 2 shows a schematic view of a first embodiment of a drilling fluid outlet system according to the invention.

25 Figure 3 shows a second embodiment of a drilling fluid outlet system according to the invention.

30 Figure 1 shows a schematic view of a drilling system 1 according to the invention. With this drilling system 1 a well bore 2 is drilled into the earth formation 3.

The drilling system 1 comprises a frame 4 onto which a fluid chamber 5 is slidably arranged along a guide 6. A drill string 7 with on its bottom end a drill bit 8 is

rotated by a top drive 9 in order to drill the well bore 2. The well bore 2 is partially lined with a casing 10. The drill string 7 is composed out of a plurality of drill string joints 11, which are interconnected by connectors 12a and 12b. Drill mud contained in a reservoir 13 is pumped by pump 14 into the drill string 7 to the drill bit 8. The drilling mud 10 flows into the annulus between the well bore wall and the drill string 7 upwards. The annulus is closed off by a rotating blow out preventer 15. The drilling mud is returned via pipe 16 and drilling fluid outlet system 17 back to the reservoir 13. When connecting another drill string joint 11 the feed of drilling mud is taken over by pump 18, which pumps the drilling fluid into the chamber 5, such that it can flow into the drill string 7.

The drilling fluid outlet system 17 ensures that a certain pressure is maintained in the well bore 2 by choking the flow in the pipe 16.

In figure 2 the drilling fluid outlet system 17 is shown in more detail. The system 17 comprises a valve 20 and a bi-directional choke 21. In the position of the valve 20 as shown in figure 2 the inlet pipe 16 is connected to the first connection pipe 22 of the choke 21. The outlet pipe 19 is connected to the second connection 23 of the choke 21. When the choke 21 gets clogged, the valve 20 is rotated, such that the inlet pipe 16 is connected to the second connection 23 of the choke 21 and the outlet pipe 19 is connected to the first connection 22 of the choke 21. In this way the flow direction is alternated and any debris, which is clogging the choke 21 is flushed away through outlet pipe 19.

In figure 3 a second embodiment 30 of a drilling fluid outlet system according to the invention is shown.

The system 30 again comprises a valve 31 and two uni-directional chokes 32 and 33. Such chokes 32,33 have a choking action in just one flow direction. Furthermore, the system 30 comprises filter means 34,35 which filter large debris in the mud, which could damage the chokes 32,33. To the inlet pipe 16 an accumulator 36 is connected, which ensures that a constant flow is maintained while the flow direction of the system 30 is alternated by turning the valve 31. Upon alternating the flow direction of the system 30 any debris present on the filter means 34,35 or in the chokes 32,33 is flushed away through outlet pipe 19.

TS 6331 EPC

C L A I M S

1. A drilling system for drilling a well bore into an earth formation, comprising:

- drilling means for drilling a well bore;
- pumping means for pumping drilling fluid into the well bore during drilling; and
- a drilling fluid outlet system for retrieving drilling fluid from the well bore, said drilling fluid outlet system comprising choke means for choking the return flow of retrieved drilling fluid, and alternating means for alternating the flow direction through the choking means.

2. The drilling system according to claim 1, wherein the drilling fluid outlet system comprises an inlet and an outlet, the choke means comprise a first inlet/outlet connection, a second outlet/inlet connection, and the alternating means connect the inlet alternately to the first or second connection and the outlet alternately to the second or first connection.

3. The drilling system according to claim 2, wherein filter means are arranged in the first and second connection of the choke means.

4. The drilling system according to any of the preceding claims, wherein the alternating means comprise a four way valve, having four connections and wherein the connections are connected two by two.

5. The drilling system according to any of the preceding claims, wherein the drilling fluid outlet system comprises an accumulator.

6. The drilling system according to any of the preceding claims, wherein the choking means comprise a bi-directional choke.

5 7. The drilling system according to any of the preceding claims, wherein the choking means comprise at least two unidirectional chokes.

8. A drilling fluid outlet system according to any of the preceding claims.

TS 6331 EPC


A B S T R A C T

CHOKE SYSTEM

The invention relates to a drilling system for drilling a well bore into an earth formation, comprising:

- drilling means for drilling a well bore;
- pumping means for pumping drilling fluid into the well bore during drilling; and
- a drilling fluid outlet system for retrieving drilling fluid from the well bore, said drilling fluid outlet system comprising choke means for choking the return flow of retrieved drilling fluid, and alternating means for alternating the flow direction through the choking means.

Fig.1.

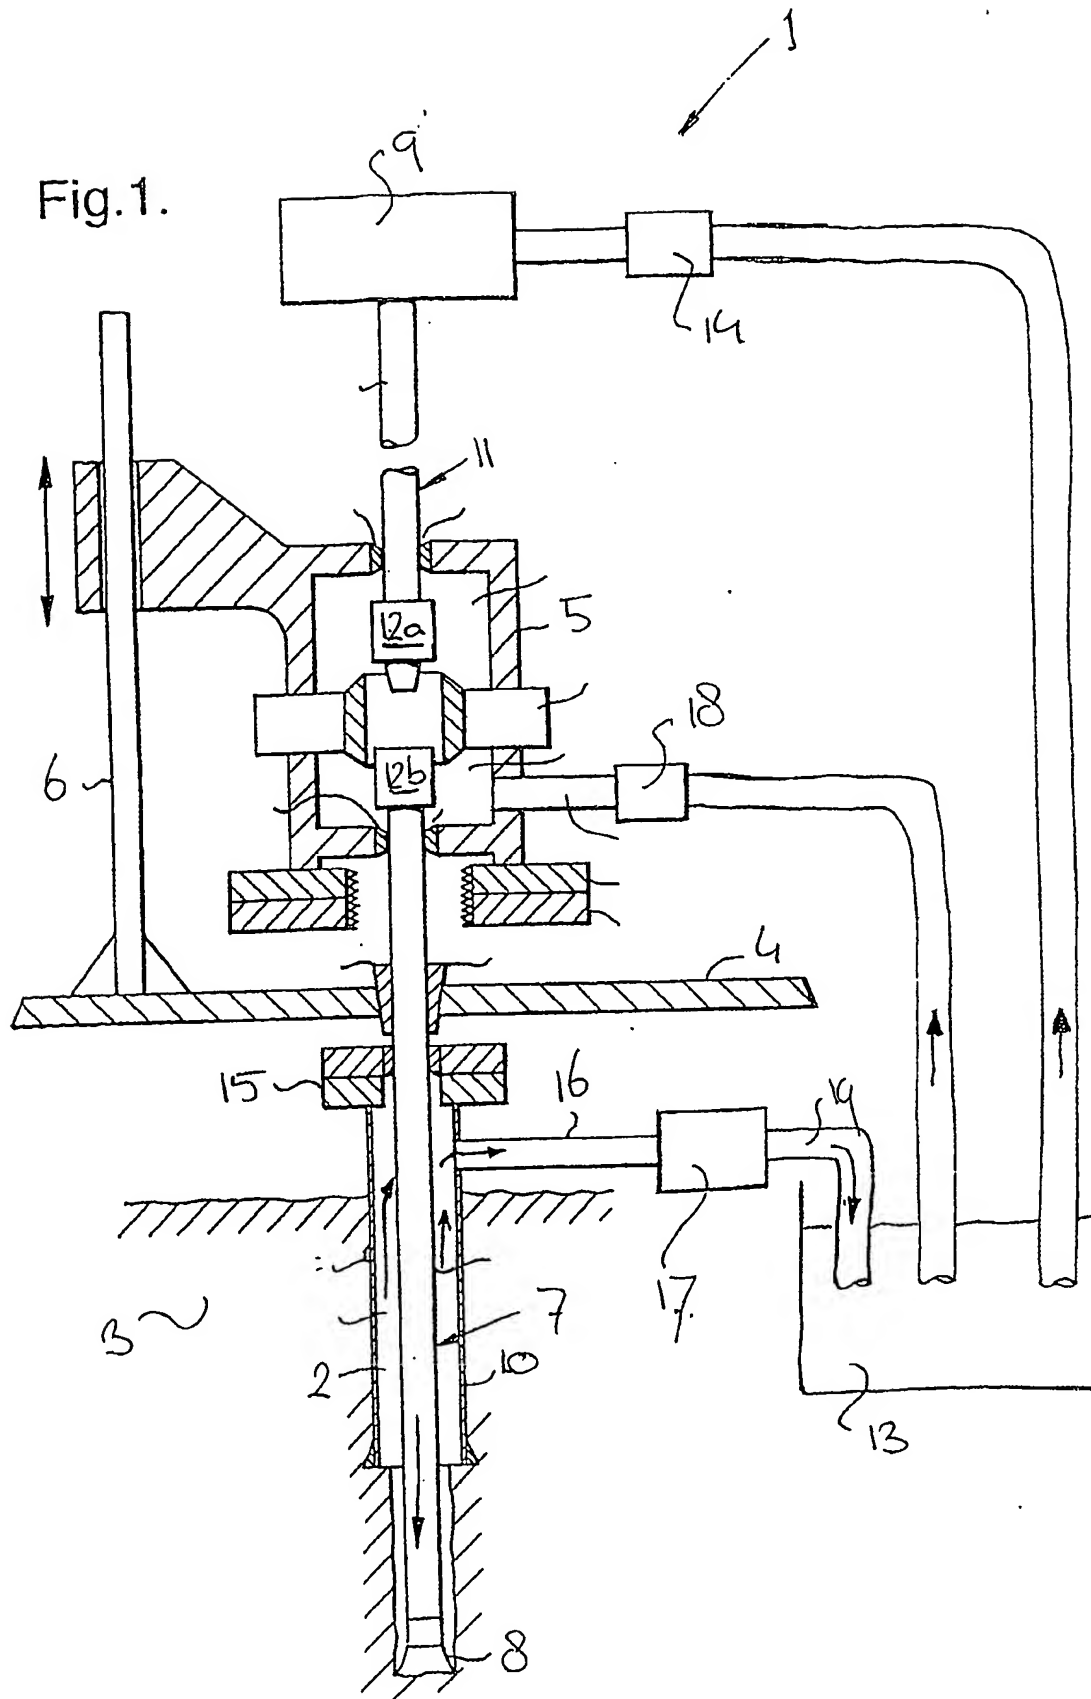

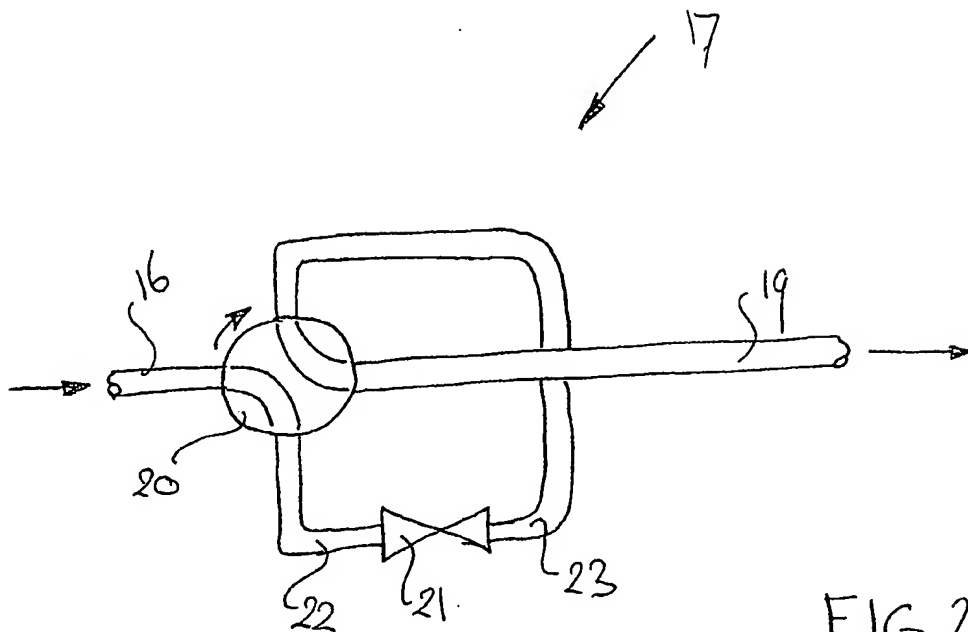


FIG 2

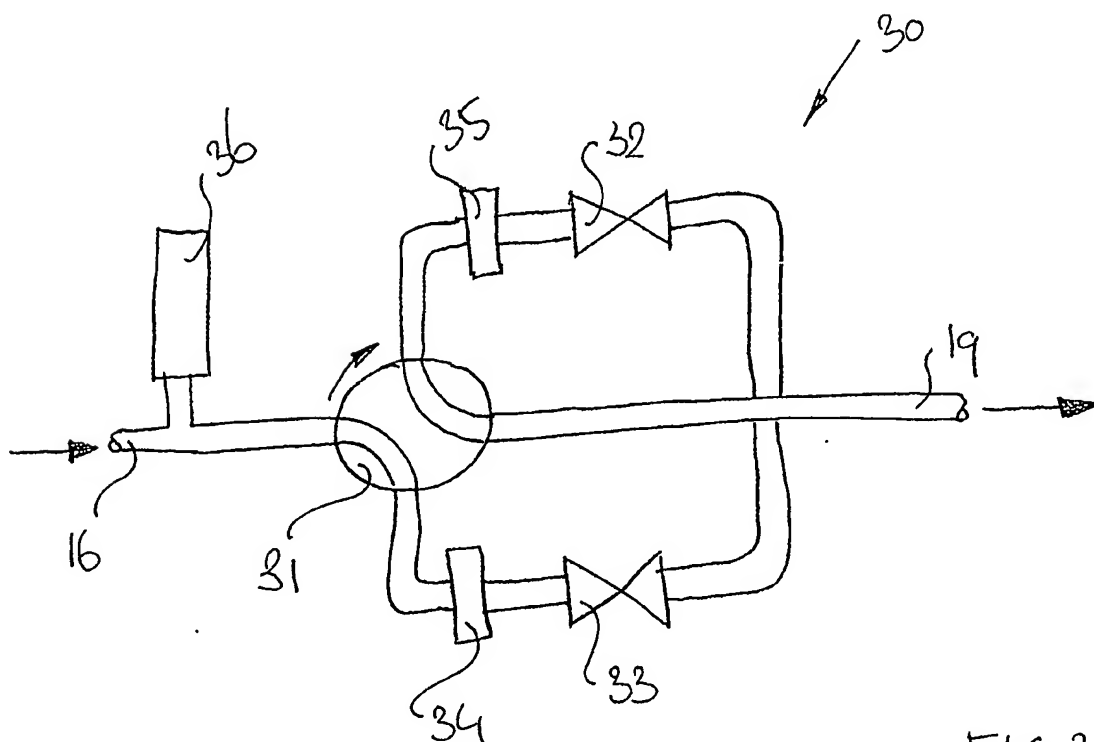


FIG 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.